

WSD7140AD

Smart High-Side Power Switch Dual Channel, 140mΩ, DFN5×6-16L , AEC-Q100 qualified

Application

- ◆ Suitable for resistive, inductive and capacitive loads
- ◆ Specially intended for automotive signal lamps
- ◆ Replaces electromechanical relays, fuses and discrete circuits

Basic Features

- ◆ Dual channel device
- ◆ Standby current <1.0μA
- ◆ 3.3 V and 5 V compatible logic inputs
- ◆ RoHS compliant and lead free
- ◆ AEC-Q100 qualified

Product Summary

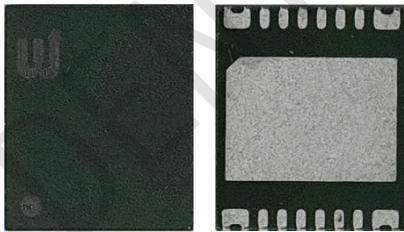
Parameter	Symbol	Value
Max. DC supply voltage	V_{CC}	35V
Operating voltage range	V_{NOM}	4.5-28V
On-state resistance (per channel, Typ.)	R_{ON}	140mohm
Nominal load current (one channel active)	$I_{L(NOM)1}$	3A
Nominal load current (All channels active)	$I_{L(NOM)2}$	2.2A
Typical current sense ratio ($I_{OUT}=2A$)	K	670
Current limitation (typ.)	I_{LIMH}	6A
Supply current in standby mode	I_{STBY}	<1.0μA

Diagnostic Functions

- ◆ Multiplexed analog feedback of load current with high precision proportional current mirror
- ◆ Off-state open load detection
- ◆ Output short to V_S detection

Protection Functions

- ◆ Undervoltage shutdown
- ◆ Overvoltage clamp
- ◆ Load current limitation
- ◆ Output short-circuit protection
- ◆ Self limiting of fast thermal transients
- ◆ Protection against loss of ground and loss of V_S
- ◆ Thermal shutdown indication
- ◆ Electrostatic discharge protection

Package Information	
Package	DFN5×6-16L
Marking	WSD7140AD
	

Typical Application Circuit

